



# ULTRAFIT<sup>®</sup>

SWR Piping Systems

**LEAK-PROOF SEWERAGE FOR  
SEEPAGE-PROOF STRUCTURES.**



Pipes as per  
IS 13592



Fittings as per  
IS 14735

## Product range

### • Pipes:


- Rubber Ring Joint: 75 to 160 mm
- Solvent Joint: 40 to 200 mm

### • Fittings:

- Rubber Ring Joint: 75, 90, 110 & 160 mm
- Solvent Joint: 40 to 160 mm

## Standards

| Pipes     |          |                                                                                  | Fittings                    |                  |          |                   |
|-----------|----------|----------------------------------------------------------------------------------|-----------------------------|------------------|----------|-------------------|
| Size (mm) | Standard | Type                                                                             | End Connection              | Size (mm)        | Standard | End Connection    |
| 40 to 200 | IS 13592 | <b>Type A</b><br>For ventilation pipe work, rain water discharge and harvesting. | Rubber Ring & Solvent Joint | 75, 90, 110, 160 | IS 14735 | Rubber Ring Joint |
|           |          | <b>Type B</b><br>For soil and waste discharge system.                            |                             | 40 to 160        |          | Solvent Joint     |

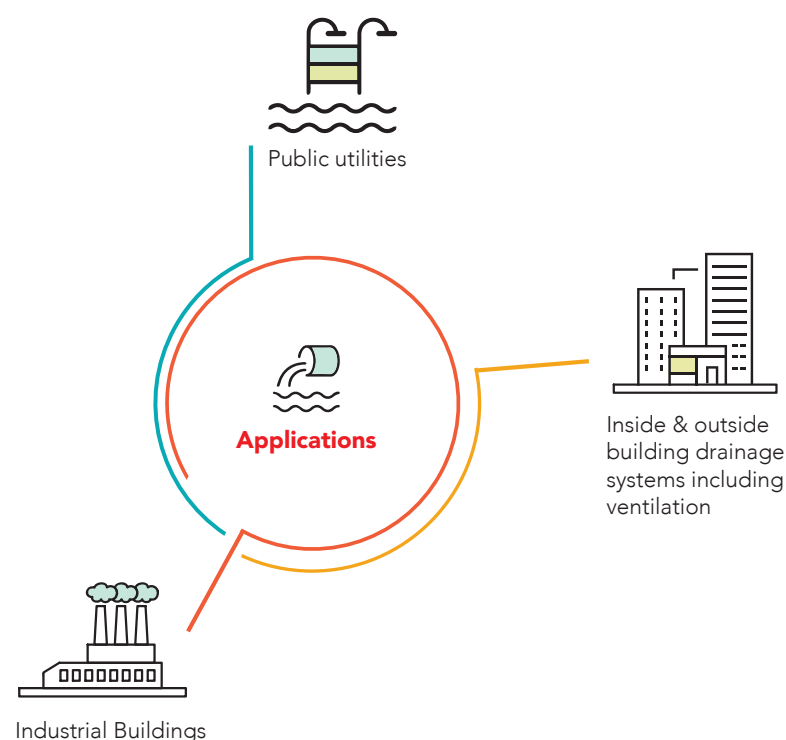

## Features and benefits

- Lighter but strong
- Compatible with other drainage products
- Easy to install with low assembly force
- Smooth bore
- Cost-efficient
- Rubber ring seals ensure long term sealing performance against leakage.

## AERATOR

SOLVENT JOINT | RUBBER RING JOINT  
FOR SINGLE STACK SYSTEM



## Technical details

| Nominal Size<br>(Outside Diameter) | Mean Outside Diameter |         | Wall Thickness |         |         |         |
|------------------------------------|-----------------------|---------|----------------|---------|---------|---------|
|                                    |                       |         | Type A         |         | Type B  |         |
|                                    | Minimum               | Maximum | Minimum        | Maximum | Minimum | Maximum |
| (mm)                               | (mm)                  | (mm)    | (mm)           | (mm)    | (mm)    | (mm)    |
| 40                                 | 40.00                 | 40.30   | 1.80           | 2.20    | 3.20    | 3.80    |
| 50                                 | 50.00                 | 50.30   | 1.80           | 2.20    | 3.20    | 3.80    |
| 63                                 | 63.00                 | 63.30   | 1.80           | 2.20    | 3.20    | 3.80    |
| 75                                 | 75.00                 | 75.30   | 1.80           | 2.20    | 3.20    | 3.80    |
| 90                                 | 90.00                 | 90.30   | 1.90           | 2.30    | 3.20    | 3.80    |
| 110                                | 110.00                | 110.40  | 2.20           | 2.70    | 3.20    | 3.80    |
| 160                                | 160.00                | 160.50  | 3.20           | 3.80    | 4.00    | 4.60    |
| 200                                | 200.00                | 200.60  | -              | -       | 4.90    | 5.60    |